


Connector: C290D

Description:
RADIO

Harness:
14401

Base Part #:
18806

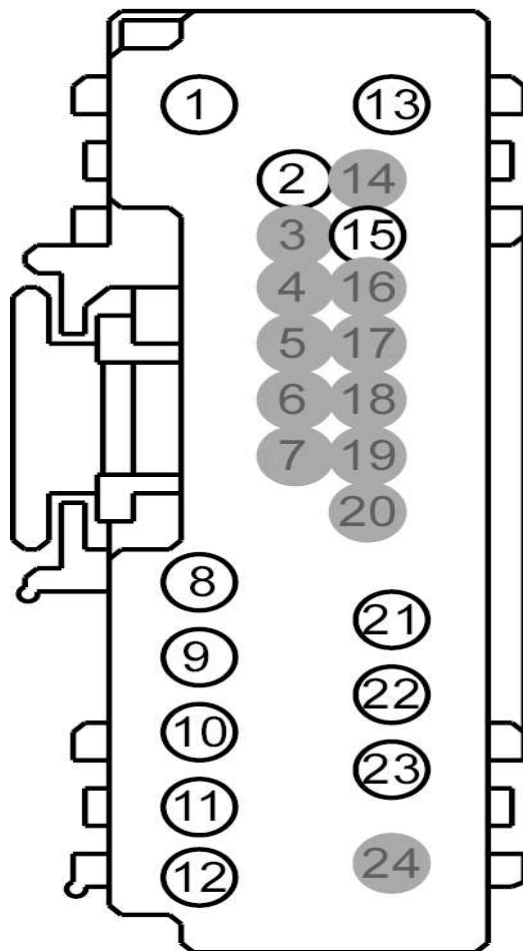

Pin	Circuit	Gauge	Circuit Function	Qualifier
1	797 (LG-VT)	18	Voltage supplied at all times (overload protected)	
2	687 (GY-YE)	20	Voltage in Run or Accessory (overload protected)	
3	*	*	not used	
4	*	*	not used	
5	*	*	not used	
6	*	*	not used	
7	*	*	not used	
8	1723 (OG-LG)	18	Speaker, left front +	
9	1726 (GY-LB)	18	Speaker, left rear +	
10	1781 (OG-RD)	18	Speaker, right rear +	
11	1778 (WH-LG)	18	Speaker, right front, +	
12	1777 (DG-OG)	18	Speaker, right front -	
13	1204 (BK-OG)	14	Ground	
14	*	*	not used	
15	1000 (RD-BK)	22	Voltage supplied in Start (overload protected)	
16	*	*	not used	
17	*	*	not used	
18	*	*	not used	
19	*	*	not used	
20	*	*	not used	
21	1722 (LB-WH)	18	Speaker, left front -	
22	1725 (TN-YE)	18	Speaker, left rear -	
23	1780 (BR-PK)	18	Speaker, right rear -	
24	*	*	not used	